公司名称：深圳市耐斯照明电器有限公司
Company Name: Shenzhen Nice Lighting Appliance Co., Ltd.
公司地址：深圳市罗湖区东门街道城东社区中兴路239号外贸集团大厦
Company Address: NO.239, ZhongXing Road, ChengDong Community, DongMen, LuoHu District, ShenZhen

工厂名称：广东省耐斯优品照明科技有限公司
Factory Name: Guangdong Nice Lighting Technology Co.,Ltd.
工厂地址：广东省中山市小榄镇佰公路5号
Factory Address: No.5, Bai road, XiaoLan, Zhongshan, GuangDong

Overseas Sales:

Ada Tel:15616214814 Email:ada@nicelighting.top
Cherry Tel:13528124396 Email:Cherry@nicelighting.top
Carrie Tel:13528148215 Email:Carrie@nicelighting.top

国内销售：

联系人：雷小姐 18125201891
联系人：邹先生 13712345230

www.nicelighting.com.cn

# 耐斯照明

## 深圳市耐斯照明电器有限公司
## Shenzhen Nice Lighting Appliance Co., Ltd.

# About

## 关于耐斯>>>

深圳耐斯照明电器有限公司，成立于2018年7月。旗下广东省耐斯优品照明科技有限公司工厂位于中山市工业强镇小榄镇。专注于研发高品质、健康、智能的高端住宅照明、别墅照明、商业照明、办公照明等 LED 系列产品。公司集研发、生产、销售、服务、于一体，坚持以健康人居光环境为导向，不断研发、创新出符合消费者需求的健康照明产品，以健康光品质和服务为品牌生命。实现目标：用光美化人们生活空间的同时，更能提供一个健康、品质、智慧、自然的生活空间。

引领行业。根据照明设计学，人的生活与光紧密关联。因此耐斯照明率先将光与健康生活联系起来探索光与环境的微妙关系，提倡"光影魅力"的光品质概念，结合耐斯智能系统，改善人的生活休闲环境，学习阅读环境，打造出有益于人体健康的智能照明解决方案。

匠人精神。对合作伙伴的尊重与扶持，对责任的敢于担当，对高品质健康照明产品的追求使命，无不彰显着耐斯对光的崇敬与服务。

以经典之光诠释永不落幕的行业之星---耐斯照明。

Shenzhen Nice Lighting Appliance Co., Ltd. was founded in July 2018. The factory under Shenzhen Nice's command, Guangdong Nice Lighting Technology Co., Ltd. is located in Xiaolan Town, an industrial strong town in Zhongshan, GuangDong, China. Focus on the research and development of high-quality, healthy, intelligent high-end residential lighting, villa lighting, commercial lighting, office lighting and other LED products. The factory integrates research and development, production, sales, and service, adhering to the healthy living lighting environment as the orientation, continuously researching and innovating health lighting products to meet consumer' s various needs, and taking health lighting quality and service as the brand life, to achieve the goal of beautifying people's living space with light, while also providing a healthy, high-quality, wisdom and natural living space.

Interpreting the never-ending industry star with classic light - Nice Lighting.


耐斯照明
Nice Lighting

# index 目录

www.nicelighting.com.cn

## 射灯
Spotlight


P02

P02

P03

P03

P04

P04

P05

P05

P06

P06

P07

P07

P08

P08

P09

P09

P10

P10

P11

P11

P12

P12

P13

P13

P14

P14

P15

P15

P16

P16

P17

P17

P18

P18

## 筒灯
Downlight


P20

P20

P21

P21

P22

P22

P23

P23

P24

P24

P25

P25

P26

P26

耐斯照明
Nice Lighting

## 轨道灯
Tracklight


P28

P28

P29

P29

P30

P30

P31

P31

P32

P32

## 明装筒灯
Surface mounted Downlight


P34

P34

P35

P35

P36

P36

P37

P37

P38

P38

P39

P39

P40

P40

P41

P41

P42

P42

## 线性射灯
Linear spotlight


P44

P44

P45

P45

P46

P46

耐斯照明
Nice Lighting

## 良好照明七大指标

## Seven indicators of good lighting

| | |
|---|---|
| 1.色温 | CCT |
| 2.显色性 | CRI |
| 3.照度 | Illumination |
| 4.光束角 | Beam angle |
| 5.眩光 | Glare |
| 6.投射方向 | Projection direction |
| 7.照度比 | Illuminance ratio |


耐斯照明
Nice Lighting

## 色温

色温是光的颜色，常用单位K表示，色温越低，光色越暖，色温越高，光色越冷，视觉发白。
针对不同的商品质地、颜色，不同的场所的氛围营造，选择合适的色温，才能达到更佳的效果呈现。

## CCT

Color temperature is the color of light, and the common unit is K. The lower the color temperature is, the warmer the color will be. The higher the color temperature is, the colder the color will be, and the vision will turn white.
For different commodity texture, color and atmosphere in different places, select the appropriate color temperature to achieve better effect.


不同的色温及不同照度的应用，会产生不同的生物反应。
The application of different color temperature and illumination will produce different biological reactions.

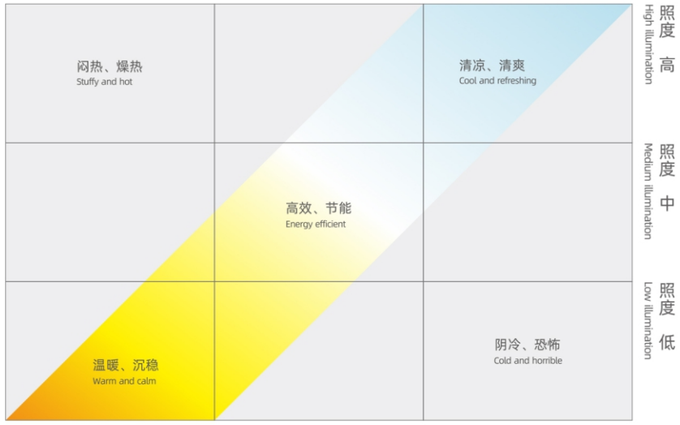


色温 低
2200 - 3300K

色温 中
3500 - 4500K

色温 高
5500 - 12000K

## 2700K-3000K

### 暖光

如日出日落的光色。

### Warm light

Such as the light color of sunrise and sunset.



## 3500K-4000K

### 中性光

中性光如早晨傍晚的光色，
清爽舒适的氛围感。

### Warm white light

Warm white light is like the light color of morning and evening,
Fresh and comfortable atmosphere.



## 5000K-6500K

### 冷白光

冷白光如中午的太阳光，
有较高的流明和显色性，应用于厨房、办公等空间。

### White light

Positive white light, such as the sunlight at noon,
It has high lumen and color rendering, and is used in kitchen, office and other spaces.



## 光色一致

耐斯精选色容差≤3-STEP LED光源，应用到不同的灯具，
使色容差迭加在色座标相近的范围内，
确保空间光色品质一致。

## Consistent light and color

Nice selective color tolerance ≤ 3-step LED light source, applied to different lamps,
The color tolerance is superimposed within the range of similar color coordinates,
Ensure consistent light and color quality in the space.

CIE1931色度图




市面常见品质使用范围




耐斯照明
Nice Lighting

## 防蓝光　健康光

蓝光（HEV）是一种高能量可见光，可直接穿透角膜和晶状体，
直达黄斑区，加速黄斑区细胞氧化，
对视网膜造成光化学损害，
蓝光含量过高会引起视觉疲劳、眼睛不适。

## Anti blue light healthy light

Blue light (HEV) is a kind of high-energy visible light, which can directly penetrate the cornea and lens,
Direct to the macular region, accelerate the cell oxidation in the macular region,
Photochemical damage to retina,
Too much blue light will cause visual fatigue and eye discomfort.

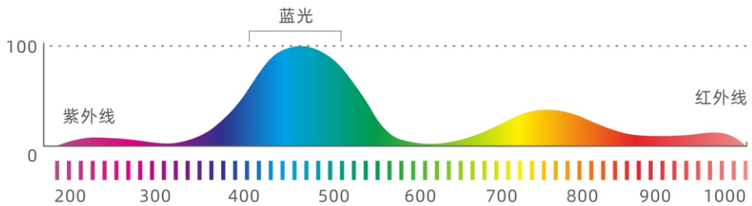


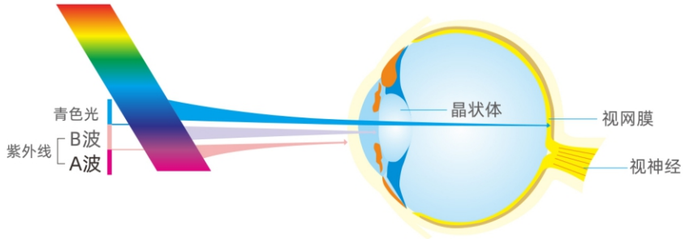


蓝光穿过眼角膜及眼球晶状体，直达视网膜

## 显色指数

显色指数CRI是指灯光对物体本身颜色的还原程度，数值越高，色彩还原度越好，物体越鲜艳。微可产品全面升级，RA区间在90-97之间。

## Color rendering index

Color rendering index CRI refers to the degree to which the light restores the color of the object itself. The higher the value, the better the color restoration degree, and the brighter the object. VICLUX products have been comprehensively upgraded, and the RA range is between 90-97.

CRI 80　　CRI 90　　CRI 95

高显色灯光呈现的被照物鲜明色彩，
完美呈现了物体的颜色、材质及表面的纹理等，是现代照明的理想灯光。

The bright color of the object illuminated by the high color rendering light,
It perfectly presents the color, material and surface texture of objects. It is an ideal light for modern lighting.

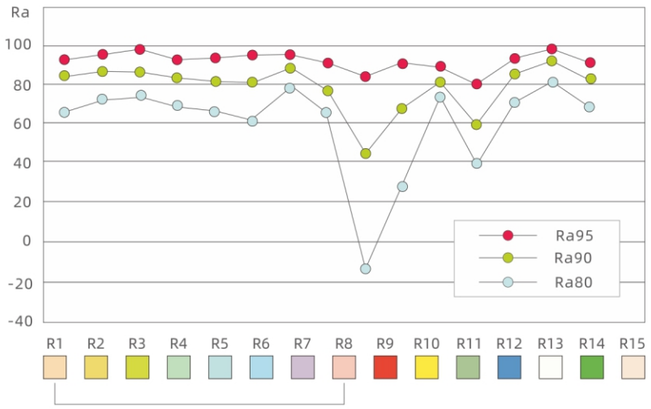


显色指数
Color rendering index

平均显色指数范围为R1至R8八种显色指数平均值
Average color rendering index ranges from R1 to R8 Eight kinds of color rendering index average

耐斯照明
Nice Lighting

## 照度

照度是常见的灯光参数，单位是lux。
同样条件，照度越高，我们视觉感觉越亮。
照度=光通量/面积，如果1lm的光，照射在1平方米的平面，照度就是1lux。

## Illumination

Illuminance is a common light parameter, and its unit is lux.
Under the same conditions, the higher the illuminance, the brighter our visual sense.
Illuminance=luminous flux/area. If 1lm light shines on a plane of 1m2, the illuminance is 1lux.

耐斯照明
Nice Lighting

## 光束角

在重点照明和照明层次规划时，需考虑选择合适的光束角。
光束角越小，越聚光，重点照明效果越强烈。
我们考虑光束角时需要考虑距离、照射物体大小，材质等。

## Beam angle

When planning key lighting and lighting levels, it is necessary to consider selecting appropriate beam angle.
The smaller the beam angle is, the more focused the light is, and the stronger the effect of accent lighting is.
When we consider the beam angle, we need to consider the distance, the size of the object, the material, etc.

**8-15°**
**小角度**
Small angle

高对比
非常生动的
（极具戏剧性效果）

High contras
Tvivid
(dramatic effect)

**20-24°**
**中等角度**
Medium angle

对比
生动的
（戏剧性效果）

Contras
Tvivid
(dramatic effect)

**30-38°**
**大角度**
Large angle

低对比效果
明显的

Low contrast effect
The obvious

**>45°**
**超大角度**
Extra large angle

基础照明
可分辩

Basic lighting
Distinguishable

## 眩光

眩光是让眼睛不舒适的光，按程度分为不舒适眩光+失能眩光；
按产生原因，分为直接眩光+间接眩光；
我们长期居住的环境中，通过合理的设计，合适的防眩灯具降低眩光影响，不刺眼，方能长期居住舒适。

## Glare

Glare is the light that makes eyes uncomfortable, which can be divided into uncomfortable glare+disability glare according to the degree;
According to the cause, it can be divided into direct glare+indirect glare;
In the environment where we live for a long time, through reasonable design, appropriate anti glare lamps can reduce the effect of glare without dazzling, so that we can live comfortably for a long time.

天花有眩光
刺眼

There is glare in the ceiling
dazzling

天花无眩光
见光不见灯
视觉舒适

Ceiling without glare
Out of sight light
Visual comfort

耐斯照明
Nice Lighting

## 照射方向

不同的灯具的照射方向产生不同的光影效果
如何照射，从哪些角度照射？
是考验设计师能力的重中之重。

## Direction of illumination

Different illuminating directions of lamps produce different light and shadow effects
How and from what angles?
It is the most important thing to test the ability of designers.

直接照明
Direct lighting

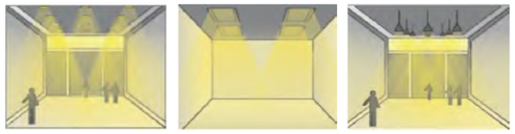

间接照明
Indirect lighting

重点照明
Key lighting

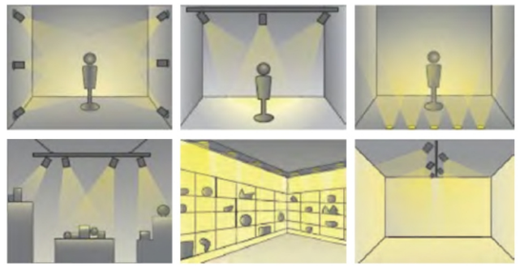

洗墙照明
Wall wash lighting

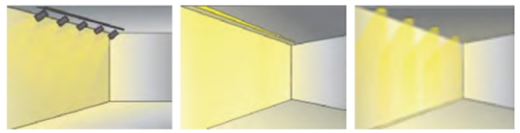

透射发光
Transmitted light

近距离照明
Close range lighting

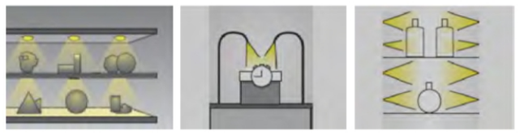

## 照度比

照度比是指一个空间，重点照明和基础照明的比值。
这个比值越高，重点照明效果越突出。
而在人居环境中，并不是照度比越高越好，太高容易视觉疲劳，我们在家居空间需要照画，照花，照食物的地方，
建议选择3:1的照度比是比较合适的。

## Illuminance ratio

Illuminance ratio refers to the ratio of key lighting and basic lighting in a space.
The higher the ratio, the more prominent the effect of accent lighting.
In the residential environment, the higher the illuminance ratio is, the better it is. Too high is easy to cause visual fatigue.
Where we need to take pictures of paintings, flowers and food in the home space, it is recommended to choose a 3:1 illuminance ratio.

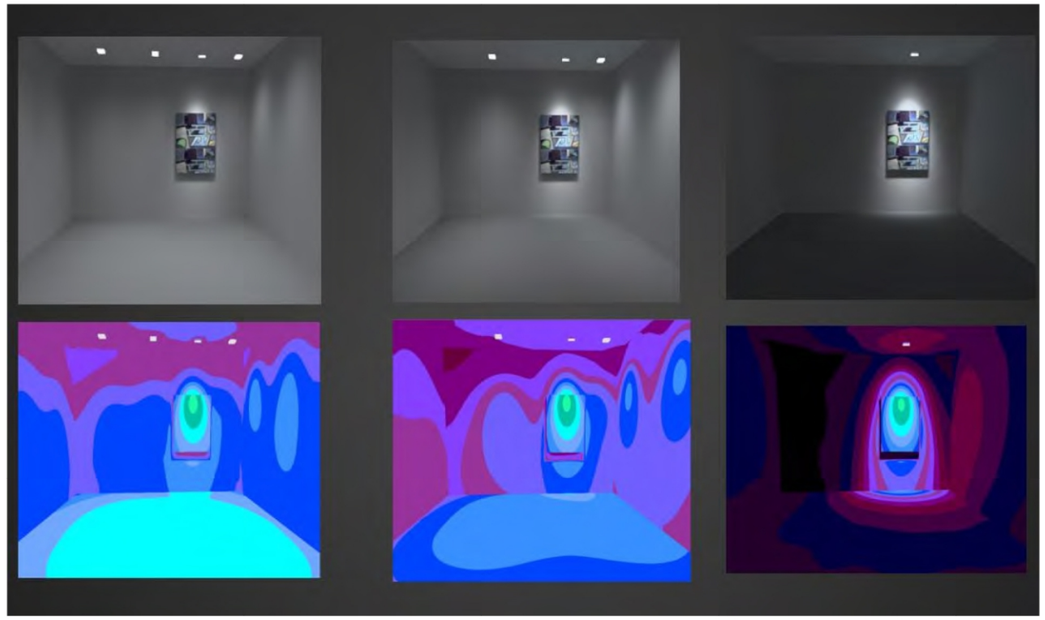

耐斯照明
Nice Lighting

## 全光谱

得到接近太阳光光谱的黑体辐射光谱，不仅仅是得到完美的颜色表达，
也让人有更加接近自然光条件下的光生物反应，回归大自然。

## All optical spectrum

The blackbody radiation spectrum close to the sunlight spectrum is not only a perfect color expression, but also a photobiological reaction closer to the natural light conditions and a return to nature.




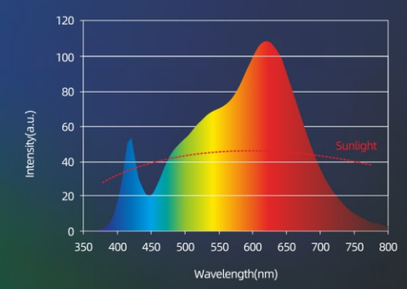


Spectrum Distribution Curve

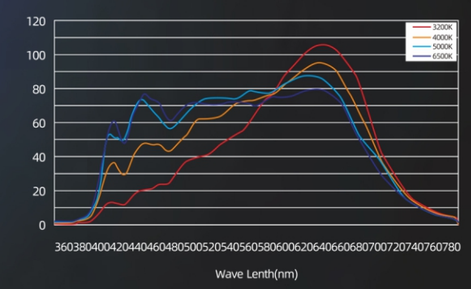


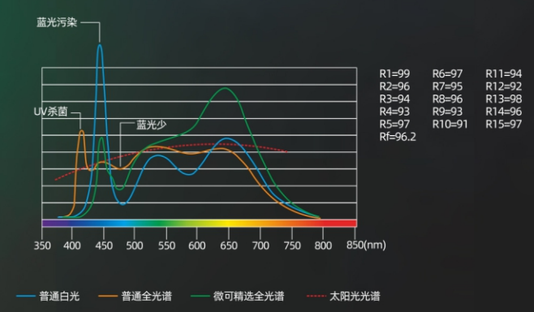

耐斯照明
Nice Lighting

## 智能调光

运用明暗对比呈现光与空间的关系，
体现不同照明的氛围，灵活操控。

Dlmming

## All optical spectrum

The blackbody radiation spectrum close to the sunlight spectrum is not only a perfect color expression, but also a photobiological reaction closer to the natural light conditions and a return to nature.

耐斯照明
Nice Lighting

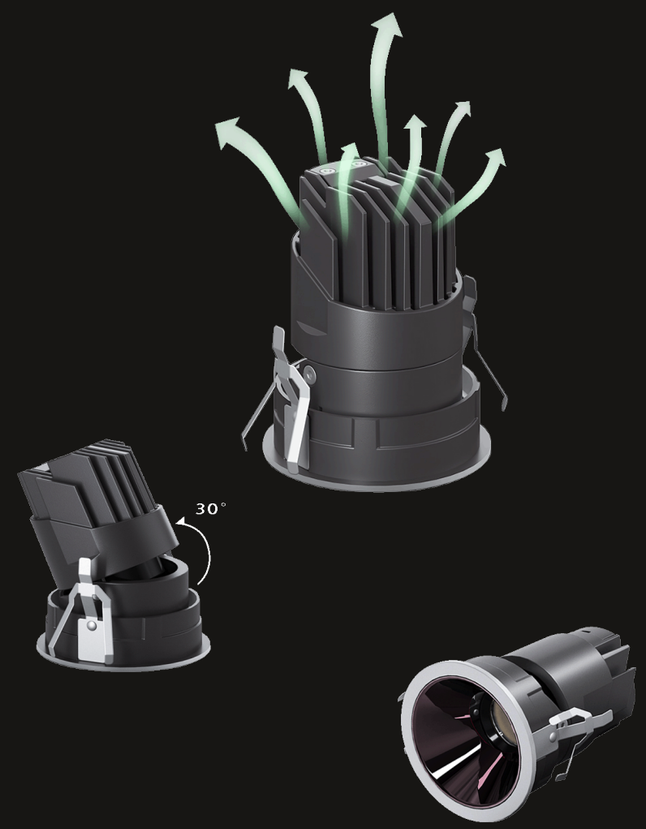


# 射灯系列
## Spotlight series

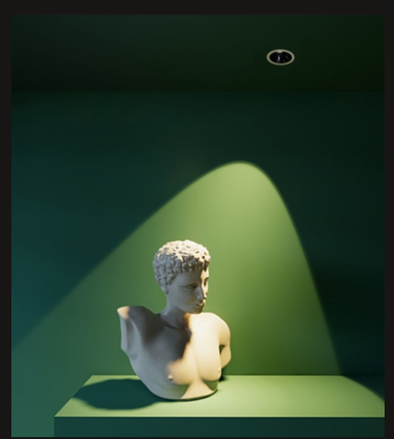

极佳的散热性能
Excellent heat radiation performance

使用寿命更长久
And longer service life





Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


15° 24° 36° 50°

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP001-3 | 3W | Φ30 | Φ37*40 | 15° /24° /36° |
| NC-SP001-5 | 5W | Φ40 | Φ45*50 | 10° /24° /36° /50° |
| NC-SP001-7 | 7W | Φ50 | Φ57*62 | 10° /15° /24° /36° |
| NC-SP001-9 | 9W | Φ60 | Φ68*78 | 10° /24° /36° /50° |

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：铝 Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


24° 45°

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP002-3 | 3W | Φ35 | Φ40*58 | 45° |
| NC-SP002-7 | 7W | Φ55 | Φ60*82 | 24° |
| NC-SP002-15 | 15W | Φ70 | Φ75*100 | 24° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP004-5 | 5W | Φ35 | Φ44*66 | 36° |
| NC-SP004-7 | 7W | Φ45 | Φ50*67 | 36° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K

2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

A

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP005-7 | 7W | Φ45 | Φ53*100 | 15°/24°/36° |
| NC-SP005A-7 | 7W | Φ45 | Φ63*100 | 15°/24°/36° |





材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

A

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP006-3 | 3W | Φ30 | Φ34*80 | 15°/24°/36° |
| NC-SP006-7 | 7W | Φ40 | Φ44*90 | 24°/36° |
| NC-SP006A-3 | 3W | Φ30 | Φ57*62 | 15°/24°/36° |
| NC-SP006A-7 | 7W | Φ40 | Φ68*78 | 24°/36° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K

2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

B

C

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP041A-3 | 3W | Φ25 | Φ30*57 | 15°/24°/36° |
| NC-SP041A-7 | 7W | Φ35 | Φ42*70 | 15°/24°/36° |
| NC-SP041A-10 | 10W | Φ45 | Φ52*74 | 15°/24°/36° |
| NC-SP041B-3 | 3W | Φ25 | Φ30*62 | 15°/24°/36° |
| NC-SP041B-7 | 7W | Φ35 | Φ42*75 | 15°/24°/36° |
| NC-SP041B-10 | 10W | Φ45 | Φ52*80 | 15°/24°/36° |
| NC-SP041C-3 | 3W | Φ30 | Φ45*63 | 15°/24°/36° |
| NC-SP041C-7 | 7W | Φ40 | Φ55*77 | 15°/24°/36° |
| NC-SP041C-10 | 10W | Φ50 | Φ65*80 | 15°/24°/36° |

耐斯照明 Nice Lighting

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP007-5 | 5W | Φ55 | Φ65*30 | 15° /24° /36° |
| NC-SP007-7 | 7W | Φ65 | Φ75*30 | 15° /24° /36° |
| NC-SP007-9 | 9W | Φ75 | Φ85*35 | 15° /24° /36° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K



15° 24° 36° 55°

Ip20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP008-5 | 5W | Φ75 | Φ90*33 | 15° /24° /36° /55° |
| NC-SP008-10 | 10W | Φ75 | Φ90*53 | 15° /24° /36° /55° |
| NC-SP008-12 | 12W | Φ95 | Φ108*38 | 15° /24° /36° /55° |
| NC-SP008-18 | 18W | Φ120 | Φ138*46 | 15° /24° /36° /55° |
| NC-SP008-30 | 30W | Φ140 | Φ158*49 | 15° /24° /36° /55° |





耐斯照明 Nice Lighting

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K



8° 15° 24° 36° 55°

Ip20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP009-5 | 5W | Φ55 | Φ63*43 | 8° /15° /24° /36° /55° |
| NC-SP009-9 | 9W | Φ75 | Φ85*49 | 8° /15° /24° /36° /55° |
| NC-SP009-15 | 15W | Φ95 | Φ105*63 | 8° /15° /24° /36° /55° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP011-10 | 10W | Φ75 | Φ82*50 | 15° /24° /36° |
| NC-SP011F-10 | 10W | 73*73 | 92*92*50 | 15° /24° /36° |
| NC-SP011F-20 | 2*10W | 154*72 | 175*92*50 | 15° /24° /36° |
| NC-SP011F-30 | 3*10W | 235*72 | 257*92*50 | 15° /24° /36° |
| NC-SP011F-40 | 4*10W | 154*154 | 175*175*50 | 15° /24° /36° |

耐斯照明 Nice Lighting

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K




Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP012-7 | 7W | Φ55 | Φ65*75 | 15° /24° /36° /55° |
| NC-SP012-9 | 9W | Φ55 | Φ65*90 | 15° /24° /36° /55° |
| NC-SP012-7 | 7W | Φ75 | Φ85*80 | 15° /24° /36° /55° |
| NC-SP012-12 | 12W | Φ75 | Φ85*90 | 15° /24° /36° /55° |
| NC-SP012-15 | 15W | Φ75 | Φ85*100 | 15° /24° /36° /55° |
| NC-SP012-24 | 24W | Φ95 | Φ105*105 | 15° /24° /36° /55° |
| NC-SP012-30 | 30W | Φ95 | Φ105*120 | 15° /24° /36° /55° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K




Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP013-7 | 7W | Φ55 | Φ65*75 | 15° /24° /36° /55° |
| NC-SP013-12 | 12W | Φ75 | Φ85*81 | 15° /24° /36° /55° |
| NC-SP013-18 | 18W | Φ95 | Φ105*95 | 15° /24° /36° /55° |
| NC-SP013F-7 | 7W | 55*55 | 65*65*82 | 15° /24° /36° /55° |
| NC-SP013F-12 | 12W | 75*75 | 85*85*91 | 15° /24° /36° /55° |
| NC-SP013F-20 | 20W | 95*95 | 105*105*109 | 15° /24° /36° /55° |
| NC-SP013F-14 | 2*7W | 105*55 | 115*65*82 | 15° /24° /36° /55° |
| NC-SP013F-24 | 2*12W | 145*75 | 155*85*91 | 15° /24° /36° /55° |
| NC-SP013F-40 | 2*20W | 185*95 | 155*85*109 | 15° /24° /36° /55° |





耐斯照明 Nice Lighting

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

B

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP016A-7 | 7W | Φ55 | Φ64*74 | 15° /24° /36° |
| NC-SP016A-12 | 12W | Φ75 | Φ84*85 | 15° /24° /36 |
| NC-SP016A-18 | 18W | Φ95 | Φ104*106 | 15° /24° /36° |
| NC-SP016B-7 | 7W | Φ55 | Φ85*74 | 15° /24° /36° |
| NC-SP016B-12 | 12W | Φ75 | Φ106*85 | 15° /24° /36 |
| NC-SP016B-18 | 18W | Φ95 | Φ125*106 | 15° /24° /36° |

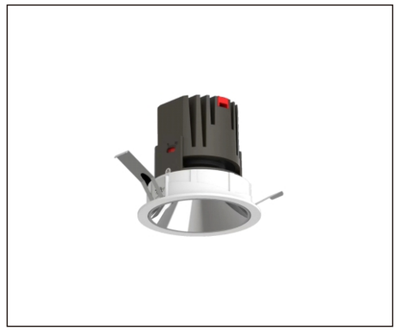

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

B

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP017A-7 | 7W | Φ55 | Φ64*78 | 15° /24° /36° |
| NC-SP017A-12 | 12W | Φ75 | Φ84*88 | 15° /24° /36 |
| NC-SP017A-24 | 24W | Φ95 | Φ104*106 | 15° /24° /36° |
| NC-SP017B-7 | 7W | Φ55 | Φ85*78 | 15° /24° /36° |
| NC-SP017B-12 | 12W | Φ75 | Φ106*88 | 15° /24° /36 |
| NC-SP017B-24 | 24W | Φ95 | Φ125*106 | 15° /24° /36° |

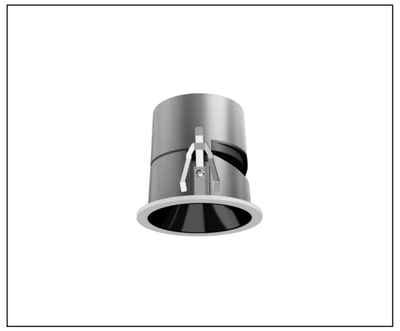

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP018-7 | 7W | Φ55 | Φ70*63 | 15° /24° /36° |
| NC-SP018-12 | 12W | Φ75 | Φ81*81 | 15° /24° /36° |
| NC-SP018-18 | 18W | Φ95 | Φ105*103 | 15° /24° /36° |

Spotlight series/射灯系列

耐斯照明 Nice Lighting

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K

2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

B C

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP020A-7 | 7W | Φ55 | Φ62*82 | 15° /24° /36° |
| NC-SP020A-12 | 12W | Φ75 | Φ85*95 | 15° /24° /36 |
| NC-SP020A-20 | 20W | Φ95 | Φ105*118 | 15° /24° /36° |
| NC-SP020B-7 | 7W | Φ55 | 62*62*82 | 15° /24° /36° |
| NC-SP020B-12 | 12W | Φ75 | 85*85*95 | 15° /24° /36 |
| NC-SP020B-20 | 20W | Φ95 | 105*105*118 | 15° /24° /36° |
| NC-SP020C-7 | 7W | Φ55 | 100*52*82 | 15° /24° /36° |
| NC-SP020C-12 | 12W | Φ75 | 120*73*95 | 15° /24° /36 |
| NC-SP020C-20 | 20W | Φ95 | 145*95*117 | 15° /24° /36° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP019-12 | 12W | Φ75 | Φ86*73 | 15° /24° /36° |



材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K



15° 24° 36° 55°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

B C D

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP021A-7 | 7W | Φ55 | Φ62*75 | 15° /24° /36° /55° |
| NC-SP021A-15 | 15W | Φ75 | Φ85*89 | 15° /24° /36° /55° |
| NC-SP021A-24 | 24W | Φ95 | Φ104*115 | 15° /24° /36° /55° |
| NC-SP021B-7 | 7W | Φ55 | Φ77*75 | 15° /24° /36° /55° |
| NC-SP021B-15 | 15W | Φ75 | Φ100*89 | 15° /24° /36° /55° |
| NC-SP021B-24 | 24W | Φ95 | Φ120*115 | 15° /24° /36° /55° |
| NC-SP021C-7 | 7W | 55*55 | 62*62*75 | 15° /24° /36° /55° |
| NC-SP021C-15 | 15W | 75*75 | 85*85*89 | 15° /24° /36° /55° |
| NC-SP021C-24 | 24W | 95*95 | 104*104*115 | 15° /24° /36° /55° |
| NC-SP021D-7 | 7W | 55*55 | 77*77*75 | 15° /24° /36° /55° |
| NC-SP021D-15 | 15W | 75*75 | 100*100*89 | 15° /24° /36° /55° |
| NC-SP021D-24 | 24W | 95*95 | 120*120*115 | 15° /24° /36° /55° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP024-20 | 20W | Φ75 | Φ90*110 | 15° /24° /36° |
| NC-SP024-30 | 30W | Φ95 | Φ115*127 | 15° /24° /36° |
| NC-SP024-40 | 40W | Φ120 | Φ140*152 | 15° /24° /36° |
| NC-SP024-60 | 60W | Φ140 | Φ160*168 | 15° /24° /36° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K



15° 24° 36° 55°

Ip20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP025-7 | 7W | Φ55 | Φ65*78 | 15° /24° /36° /55° |
| NC-SP025-9 | 9W | Φ55 | Φ65*92 | 15° /24° /36° /55° |
| NC-SP025-7 | 7W | Φ75 | Φ82*75 | 15° /24° /36° /55° |
| NC-SP025-12 | 12W | Φ75 | Φ82*96 | 15° /24° /36° /55° |
| NC-SP025-15 | 15W | Φ75 | Φ82*100 | 15° /24° /36° /55° |
| NC-SP025-18 | 18W | Φ75 | Φ82*108 | 15° /24° /36° /55° |
| NC-SP025-20 | 20W | Φ95 | Φ105*110 | 15° /24° /36° /55° |
| NC-SP025-24 | 24W | Φ95 | Φ105*120 | 15° /24° /36° /55° |





材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K



10° 15° 24° 36°

Ip20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP026-12 | 12W | Φ75 | Φ90*115 | 10° /15° /24° /36° |
| NC-SP026-18 | 18W | Φ90 | Φ110*135 | 10° /15° /24° /36° |
| NC-SP026-24 | 24W | Φ125 | Φ138*158 | 10° /15° /24° /36° |
| NC-SP026-30 | 30W | Φ145 | Φ160*178 | 10° /15° /24° /36° |
| NC-SP026-35 | 35W | Φ160 | Φ180*194 | 10° /15° /24° /36° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP027-5 | 5W | Φ55 | Φ62*75 | 15° /24° /36° |
| NC-SP027-10 | 10W | Φ55 | Φ85*89 | 15° /24° /36° |
| NC-SP027-7 | 7W | Φ75 | Φ104*115 | 15° /24° /36° |
| NC-SP027-12 | 12W | Φ75 | Φ77*75 | 15° /24° /36° |
| NC-SP027-15 | 15W | Φ75 | Φ100*89 | 15° /24° /36° |
| NC-SP027-18 | 18W | Φ95 | Φ120*115 | 15° /24° /36° |
| NC-SP027-30 | 30W | Φ120 | 62*62*75 | 15° /24° /36° |

耐斯照明 Nice Lighting

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP030-7 | 7W | Φ55 | Φ79*55 | 15° /24° /36° |
| NC-SP030-12 | 12W | Φ75 | Φ94*64 | 15° /24° /36° |
| NC-SP030-18 | 18W | Φ95 | Φ109*85 | 15° /24° /36° |

Spotlight series/射灯系列

耐斯照明 Nice Lighting

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

24° 36°

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP032-7 | 7W | Φ65 | Φ75*60 | 24° /36° |
| NC-SP032-12 | 12W | Φ75 | Φ84*78 | 24° /36° |

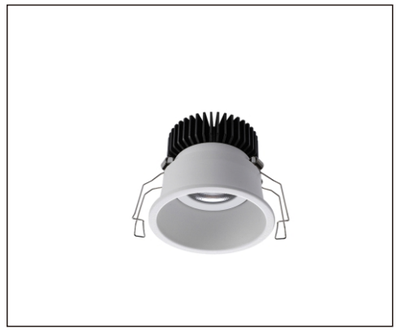

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP031-7 | 7W | Φ55 | Φ64*58 | 15° /24° /36° |
| NC-SP031-12 | 12W | Φ75 | Φ85*71 | 15° /24° /36° |
| NC-SP031-18 | 18W | Φ95 | Φ104*98 | 15° /24° /36° |


Ip65 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K

2700K 3000K 3500K 4000K 5000K



15° 24° 36° 45° 60°

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP034-10 | 10W | Φ75 | Φ90*90 | 15° /24° /36° /45° /60° |
| NC-SP034-24 | 24W | Φ95 | Φ110*110 | 15° /24° /36° /45° /60° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K




Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP035-12 | 12W | Φ75 | Φ90*90 | 15° /24° /36° /50° |
| NC-SP035-18 | 18W | Φ95 | Φ110*105 | 15° /24° /36° /50° |
| NC-SP035-30 | 30W | Φ115 | Φ135*126 | 15° /24° /36° /50° |
| NC-SP035F-24 | 2*12W | 160*80 | 130*70*90 | 15° /24° /36° /50° |
| NC-SP035F-36 | 2*18W | 200*100 | 210*110*105 | 15° /24° /36° /50° |
| NC-SP035F-60 | 2*30W | 240*120 | 260*135*126 | 15° /24° /36° /50° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K




Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP036-9 | 9W | Φ75 | Φ90*70 | 15° /24° /36° /50° |
| NC-SP036-18 | 18W | Φ95 | Φ110*80 | 15° /24° /36° /50° |
| NC-SP036-30 | 30W | Φ120 | Φ135*96 | 15° /24° /36° /50° |
| NC-SP036-40 | 40W | Φ150 | Φ165*130 | 15° /24° /36° /50° |





材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K




Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP037-5 | 5W | Φ60 | Φ70*67 | 15° /24° /36° /50° |
| NC-SP037-12 | 12W | Φ75 | Φ90*90 | 15° /24° /36° /50° |
| NC-SP037-18 | 18W | Φ95 | Φ110*105 | 15° /24° /36° /50° |
| NC-SP037-30 | 30W | Φ115 | Φ135*126 | 15° /24° /36° /50° |
| NC-SP037F-5 | 5W | 60*60 | 70*70*69 | 15° /24° /36° /50° |
| NC-SP037F-12 | 12W | 75*75 | 90*90*89 | 15° /24° /36° /50° |
| NC-SP037F-18 | 18W | 95*95 | 110*110*105 | 15° /24° /36° /50° |
| NC-SP037F-30 | 30W | 115*115 | 135*135*126 | 15° /24° /36° /50° |
| NC-SP037F-24 | 2*12W | 158*78 | 170*90*89 | 15° /24° /36° /50° |
| NC-SP037F-36 | 2*18W | 198*98 | 210*110*105 | 15° /24° /36° /50° |
| NC-SP037F-60 | 2*30W | 240*118 | 260*135*126 | 15° /24° /36° /50° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP039-12 | 12W | 80*80 | 95*95*73 | 15° /24° /36° |
| NC-SP039-24 | 2*12W | 180*80 | 193*95*73 | 15° /24° /36° |

耐斯照明 Nice Lighting

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP042-10 | 10W | Φ75 | Φ85*53 | 15° /24° /36° |
| NC-SP042F-10 | 10W | 75*75 | 85*85*53 | 15° /24° /36° |
| NC-SP042F-20 | 2*10W | 155*75 | 166*85*53 | 15° /24° /36° |
| NC-SP042F-30 | 3*10W | 235*75 | 250*82*53 | 15° /24° /36° |

Spotlight series/射灯系列

耐斯照明 Nice Lighting

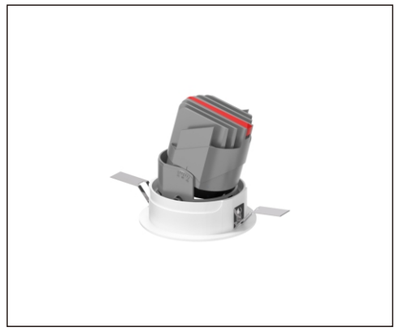

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

B

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP044A-7 | 7W | Φ55 | Φ68*73 | 15° /24° /36° |
| NC-SP044A-12 | 12W | Φ75 | Φ85*92 | 15° /24° /36° |
| NC-SP044A-18 | 18W | Φ95 | Φ110*128 | 15° /24° /36° |
| NC-SP044B-7 | 7W | Φ55 | Φ80*73 | 15° /24° /36° |
| NC-SP044B-12 | 12W | Φ75 | Φ102*92 | 15° /24° /36° |
| NC-SP044B-18 | 18W | Φ95 | Φ130*128 | 15° /24° /36° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP046-10 | 10W | Φ75 | Φ87*67 | 15° /24° /36° |
| NC-SP046F-10 | 10W | 71*71 | 85*85*67 | 15° /24° /36° |
| NC-SP046F-20 | 2*10W | 155*75 | 166*84*67 | 15° /24° /36° |
| NC-SP046F-30 | 3*10W | 235*75 | 250*84*67 | 15° /24° /36° |

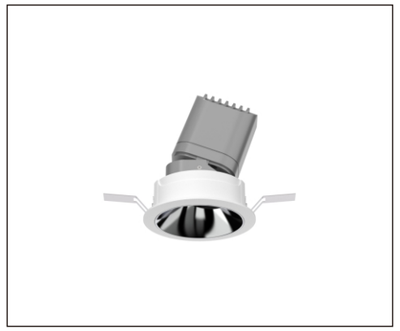

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

B

## 射灯 Spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SP045A-7 | 7W | Φ55 | Φ68*80 | 15° /24° /36° |
| NC-SP045A-12 | 12W | Φ75 | Φ85*98 | 15° /24° /36° |
| NC-SP045A-18 | 18W | Φ95 | Φ110*136 | 15° /24° /36° |
| NC-SP045B-12 | 12W | Φ75 | Φ100*98 | 15° /24° /36° |
| NC-SP045B-18 | 18W | Φ95 | Φ128*136 | 15° /24° /36° |

耐斯照明
Nice Lighting

## 混合光学透镜
Hybrid optical lens

## 一灯两用，即是筒灯，也是射灯
One lamp for dual use, which is both a downlight and a spotlight


## 筒灯系列
## Downlight series





耐斯照明
Nice Lighting


Ip65 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


30° 45°

### 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ001-10 | 10W | Φ90 | Φ100*75 | 45° |
| NC-TQ001-18 | 18W | Φ130 | Φ140*90 | 45° |
| NC-TQ001-30 | 30W | Φ170 | Φ185*112 | 45° |
| NC-TQ001-40 | 40W | Φ200 | Φ230*128 | 30° |


Ip54 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：铝 Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


15° 30° 45°

### 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ003-10 | 10W | Φ100-105 | Φ115*48 | 15° 30° 45° |
| NC-TQ003-15 | 15W | Φ130-135 | Φ145*60 | 15° 30° 45° |
| NC-TQ003-20 | 20W | Φ145-150 | Φ159*60 | 15° 30° 45° |
| NC-TQ003-25 | 25W | Φ170-180 | Φ190*60 | 15° 30° 45° |
| NC-TQ003-30 | 30W | Φ205-215 | Φ230*72 | 15° 30° 45° |

耐斯照明 Nice Lighting


Ip65 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


15° 24° 45°

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ005-12 | 12W | Φ75 | Φ84*65 | 15° /24° /45° |
| NC-TQ005-15 | 18W | Φ95 | Φ104*70 | 15° /24° /45° |


Ip65 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：铝 Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


24° 45° 60°

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ006-10 | 10W | Φ75 | Φ85*70 | 24° /45° /60° |
| NC-TQ006-15 | 15W | Φ95 | Φ110*78 | 24° /45° /60° |
| NC-TQ006-20 | 20W | Φ125 | Φ135*91 | 24° /45° /60° |
| NC-TQ006-30 | 25W | Φ155 | Φ180*106 | 24° /45° /60° |
| NC-TQ006-30 | 50W | Φ220 | Φ242*140 | 24° /45° /60° |





耐斯照明 Nice Lighting

Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


15° 24° 36° 55°

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ007-7 | 7W | Φ55 | Φ62*59 | 15° /24° /36° /55° |
| NC-TQ007-12 | 12W | Φ75 | Φ85*64 | 15° /24° /36° /55° |
| NC-TQ007-15 | 15W | Φ95 | Φ105*72 | 15° /24° /36° /55° |
| NC-TQ007-18 | 18W | Φ115 | Φ130*73 | 15° /24° /36° /55° |

Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：铝 Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


15° 24° 36°

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ008-5 | 5W | Φ55 | Φ63*50 | 15° /24° /36° |
| NC-TQ008-7 | 7W | Φ75 | Φ80*50 | 15° /24° /36° |
| NC-TQ008-12 | 12W | Φ95 | Φ105*64 | 15° /24° /36° |

耐斯照明 Nice Lighting

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

120°

Ip20 | CRI ≥90 | SMD | Life 30000h | CE

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ009-5 | 5W | Φ55 | Φ60*40 | 120° |
| NC-TQ009-7 | 7W | Φ75 | Φ82*45 | 120° |
| NC-TQ009-12 | 12W | Φ85 | Φ94*48 | 120° |
| NC-TQ009-20 | 20W | Φ95 | Φ105*53 | 120° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36° 55°

Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ011-10 | 10W | Φ75 | Φ86*55 | 15° /24° /36° /55° |
| NC-TQ011-18 | 18W | Φ90 | Φ101*60 | 15° /24° /36° /55° |
| NC-TQ011-30 | 30W | Φ125 | Φ140*73 | 15° /24° /36° /55° |
| NC-TQ011-40 | 40W | Φ165 | Φ180*94 | 15° /24° /36° /55° |
| NC-TQ011-50 | 50W | Φ200 | Φ214*110 | 15° /24° /36° /55° |





耐斯照明 Nice Lighting

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K



15° 24° 36° 55°

Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ012-10 | 10W | Φ75 | Φ85*63 | 15° /24° /36° /55° |
| NC-TQ012F-10 | 10W | 75*75 | 85*85*63 | 15° /24° /36° /55° |
| NC-TQ012F-20 | 20W | 155*72 | 167*85*63 | 15° /24° /36° /55° |
| NC-TQ012F-30 | 30W | 240*72 | 252*85*63 | 15° /24° /36° /55° |
| NC-TQ012F-40 | 40W | 150*150 | 165*165*63 | 15° /24° /36° /55° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K



15° 24° 36° 55°

Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ013-7 | 7W | Φ55 | Φ63*52 | 15° /24° /36° /55° |
| NC-TQ013-10 | 10W | Φ75 | Φ85*64 | 15° /24° /36° /55° |
| NC-TQ013-18 | 18W | Φ90 | Φ102*74 | 15° /24° /36° /55° |
| NC-TQ013F-7 | 7W | 55*55 | 63*63*52 | 15° /24° /36° /55° |
| NC-TQ013F-10 | 10W | 75*75 | 85*85*64 | 15° /24° /36° /55° |
| NC-TQ013F-18 | 18W | 90*90 | 102*102*74 | 15° /24° /36° /55° |
| NC-TQ013F-14 | 2*7W | 120*55 | 130*63*52 | 15° /24° /36° /55° |
| NC-TQ013F-20 | 2*10W | 150*75 | 165*85*64 | 15° /24° /36° /55° |
| NC-TQ013F-21 | 3*7W | 175*55 | 185*63*52 | 15° /24° /36° /55° |
| NC-TQ013F-30 | 3*10W | 230*75 | 240*85*64 | 15° /24° /36° /55° |

耐斯照明 Nice Lighting

Ip20 | UGR＜16 | CRI ≥90 | SMD | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

120°

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ014-7 | 7W | Φ75 | Φ88*46 | 120° |
| NC-TQ014-12 | 12W | Φ95 | Φ105*60 | 120° |
| NC-TQ014-15 | 15W | Φ110 | Φ130*68 | 120° |
| NC-TQ014-24 | 24W | Φ165 | Φ185*93 | 120° |
| NC-TQ014-30 | 30W | Φ195 | Φ220*98 | 120° |

Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 30 45°

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ017-7 | 7W | Φ60 | Φ70*55 | 15° /30° /45° |
| NC-TQ017-12 | 12W | Φ80 | Φ95*75 | 15° /30° /45° |
| NC-TQ017-18 | 18W | Φ100 | Φ120*95 | 15° /30° /45° |
| NC-TQ017-24 | 24W | Φ120 | Φ140*105 | 15° /30° /45° |
| NC-TQ017-30 | 30W | Φ150 | Φ167*120 | 15° /30° /45° |
| NC-TQ017-40 | 40W | Φ185 | Φ197*140 | 15° /30° /45° |
| NC-TQ017-60 | 60W | Φ220 | Φ236*165 | 15° /30° /45° |





耐斯照明 Nice Lighting

Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36° 55°

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ021-5 | 5W | Φ55 | Φ60*35 | 15° /24° /36° /55° |
| NC-TQ021-7 | 17W | Φ75 | Φ85*45 | 15° /24° /36° /55° |
| NC-TQ021-9 | 9W | Φ80 | Φ90*47 | 15° /24° /36° /55° |
| NC-TQ021-12 | 12W | Φ95 | Φ105*50 | 15° /24° /36° /55° |
| NC-TQ021-15 | 15W | Φ120 | Φ130*52 | 15° /24° /36° /55° |
| NC-TQ021-20 | 20W | Φ145 | Φ160*60 | 15° /24° /36° /55° |
| NC-TQ021-24 | 24W | Φ160 | Φ175*63 | 15° /24° /36° /55° |
| NC-TQ021-36 | 36W | Φ200 | Φ220*75 | 15° /24° /36° /55° |

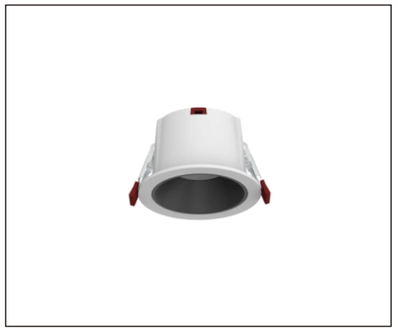

Ip20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K

2700K 3000K 3500K 4000K 5000K



15° 24° 36° 55°

## 筒灯 Downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TQ022-10 | 10W | Φ75 | Φ90*56 | 15° /24° /36° /55° |
| NC-TQ022-12 | 12W | Φ80 | Φ95*60 | 15° /24° /36° /55° |
| NC-TQ022-15 | 15W | Φ95 | Φ105*64 | 15° /24° /36° /55° |
| NC-TQ022-18 | 18W | Φ120 | Φ130*72 | 15° /24° /36° /55° |
| NC-TQ022-30 | 30W | Φ145 | Φ160*82 | 15° /24° /36° /55° |
| NC-TQ022-40 | 40W | Φ160 | Φ180*90 | 15° /24° /36° /55° |
| NC-TQ022-50 | 50W | Φ200 | Φ230*100 | 15° /24° /36° /55° |
| NC-TQ013F-20 | 2*10W | 150*75 | 165*85*64 | 15° /24° /36° /55° |
| NC-TQ013F-21 | 3*7W | 175*55 | 185*63*52 | 15° /24° /36° /55° |

耐斯照明
Nice Lighting

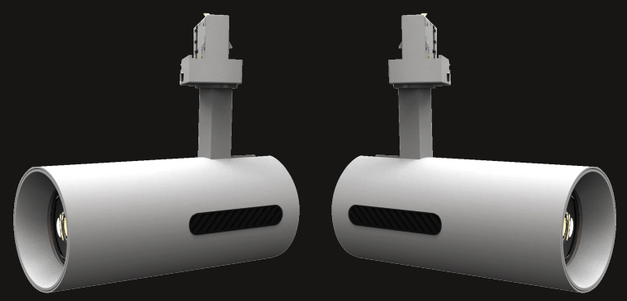

# 轨道灯系列
## Track spotlight series





IP20 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K



10°---60°

## 轨道灯 Track spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-GP002-10 | 10W | | Φ50*105 | 10° --- 60° |
| NC-GP002-20 | 20W | | Φ60*152 | 10° --- 60° |
| NC-GP002-30 | 30W | | Φ70*157 | 10° --- 60° |

IP20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：铝 Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

## 轨道灯 Track spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-GP004-10 | 10W | | Φ50*130 | 15° /24° /36° |
| NC-GP004-20 | 20W | | Φ65*160 | 15° /24° /36° |
| NC-GP004-30 | 30W | | Φ75*180 | 15° /24° /36° |

材质Material：铝Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


IP20 | CRI ≥97 | COB | Life 30000h | CE

## 轨道灯 Track spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-GP005-10 | 10W | | Φ48*120 | 15° /24° /36° |
| NC-GP005-15 | 15W | | Φ58*135 | 15° /24° /36° |
| NC-GP005-24 | 24W | | Φ68*155 | 15° /24° /36° |
| NC-GP005-30 | 30W | | Φ80*155 | 15° /24° /36° |

Track spotlight series/轨道灯系列

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K




IP20 | CRI ≥97 | COB | Life 30000h | CE

## 轨道灯 Track spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-GP010-18 | 18W | | Φ65*155 | 15° /24° /36° /55° |
| NC-GP010-30 | 30W | | Φ80*160 | 15° /24° /36° /55° |

材质Material：铝 Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


IP20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

## 轨道灯 Track spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-GP007-20 | 20W | | Φ60*135 | 15° /24° /36° |
| NC-GP007-30 | 30W | | Φ80*150 | 15° /24° /36° |
| NC-GP007-40 | 40W | | Φ90*170 | 15° /24° /36° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


IP20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

## 轨道灯 Track spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-GP008-18 | 18W | | Φ60*135 | 15° /24° /36° |
| NC-GP008-24 | 24W | | Φ70*140 | 15° /24° /36° |
| NC-GP008-30 | 30W | | Φ80*145 | 15° /24° /36° |
| NC-GP008-35 | 35W | | Φ90*150 | 15° /24° /36° |

材质Material：铝Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

IP20 CRI ≥97 COB Life 30000h CE

## 轨道灯 Track spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-GP011-15 | 15W | | Φ58*138 | 15° /24° /36° |
| NC-GP011-20 | 20W | | Φ75*160 | 15° /24° /36° |
| NC-GP011-30 | 30W | | Φ90*180 | 15° /24° /36° |

Track spotlight series/轨道灯系列

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K



24° 36°

IP20 CRI ≥97 COB Life 30000h CE

## 轨道灯 Track spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-GP013-10 | 10W | | 120*22*120 | 24° /36 |
| NC-GP013-20 | 20W | | 230*22*120 | 24° /36° |

材质Material：铝 Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 30° 45°

IP20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 轨道灯 Track spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-GP012-10 | 10W | | 135*33*155 | 15° /30° /45° |
| NC-GP012-20 | 20W | | 270*33*155 | 15° /30° /45° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K



15° 24° 36° 50°

IP20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 轨道灯 Track spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-GP014-12 | 3*4W | | 124*42*93 | 15° /24° /36° /50° |
| NC-GP014-20 | 5*4W | | 200*43*93 | 15° /24° /36° /50° |
| NC-GP014-40 | 10*4W | | 392*43*93 | 15° /24° /36° /50° |
| NC-GP014-60 | 15*4W | | 600*42*93 | 15° /24° /36° /50° |
| NC-GP014-100 | 25*4W | | 960*42*93 | 15° /24° /36° /50° |

耐斯照明
Nice Lighting

光随我动
灵活方便

# 明装筒射灯系列
## Surface mounted downlight series

可明装，可嵌入






耐斯照明
Nice Lighting

IP20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


15° 30° 45°

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM001-20 | 20W | | Φ76*150 | 15° /30° /45° |
| NC-TM001-24 | 24W | | Φ96*150 | 15° /30° /45° |
| NC-TM001-30 | 30W | | Φ116*150 | 15° /30° /45° |
| NC-TM001-40 | 40W | | Φ142*160 | 15° /30° /45° |
| NC-TM001-50 | 50W | | Φ170*180 | 15° /30° /45° |
| NC-TM001-60 | 60W | | Φ205*210 | 15° /30° /45° |

IP20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：铝 Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


15° 30° 45°

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM002-7 | 7W | | 55*55*80 | 15° /30° /45° |
| NC-TM002-7a | 7W | | 55*55*120 | 15° /30° /45° |
| NC-TM002-12 | 12W | | 75*75*95 | 15° /30° /45° |
| NC-TM002-12a | 12W | | 75*75*140 | 15° /30° /45° |
| NC-TM002-20 | 20W | | 95*95*105 | 15° /30° /45° |
| NC-TM002-20a | 20W | | 95*95*150 | 15° /30° /45° |
| NC-TM002-25 | 25W | | 115*115*110 | 15° /30° /45° |
| NC-TM002-25a | 25W | | 115*115*160 | 15° /30° /45° |

耐斯照明 Nice Lighting

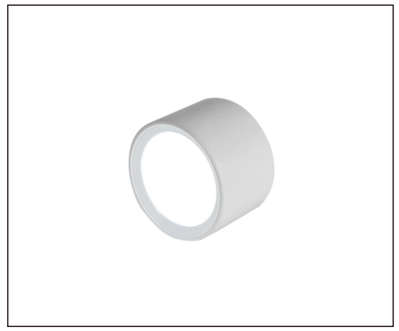

IP20 | CRI ≥90 | SMD | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

120°

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM003-9 | 9W | | Φ80*60 | 120° |
| NC-TM003-15 | 15W | | Φ100*65 | 120° |
| NC-TM003-20 | 20W | | Φ120*70 | 120° |
| NC-TM003-25 | 25W | | Φ150*80 | 120° |
| NC-TM003-30 | 30W | | Φ170*90 | 120° |
| NC-TM003-36 | 36W | | Φ200*100 | 120° |

IP20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 38°

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM004-9 | 9W | | Φ77*85 | 15° /24° /38° |
| NC-TM004-12 | 12W | | Φ96*90 | 15° /24° /38° |
| NC-TM004-18 | 18W | | Φ120*100 | 15° /24° /38° |
| NC-TM004-25 | 25W | | Φ150*120 | 15° /24° /38° |
| NC-TM004-30 | 30W | | Φ175*130 | 15° /24° /38° |
| NC-TM004-36 | 36W | | Φ200*140 | 15° /24° /38° |





耐斯照明 Nice Lighting

IP20 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

24°

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM007-5 | 5W | | Φ65*70 | 24° |
| NC-TM007-10 | 10W | | Φ85*80 | 24° |

IP20 | UGR < 16 | CRI ≥97 | COB | Life 30000h | CE

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM008-5 | 5W | | Φ65*70 | 15° /24° /36° |
| NC-TM008-7 | 7W | | Φ75*75 | 15° /24° /36° |
| NC-TM008-9 | 9W | | Φ85*80 | 15° /24° /36° |

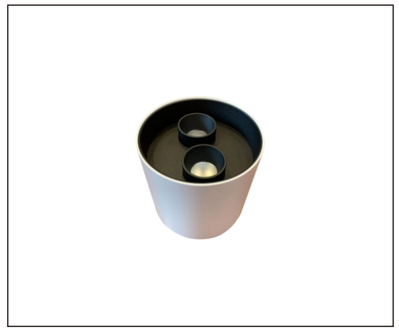

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

IP20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM009-10 | 10W | | Φ86*80 | 15° /24° /36° |
| NC-TM009-12 | 12W | | Φ86*80 | 15° /24° /36° |
| NC-TM009-18 | 18W | | Φ96*90 | 15° /24° /36° |

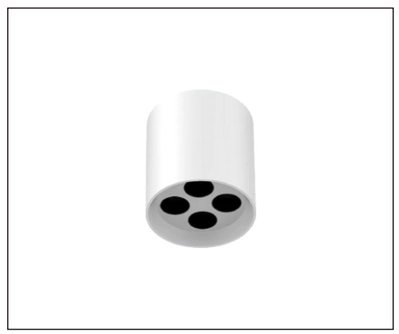

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

IP20 UGR＜16 CRI ≥97 COB Life 30000h CE



## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM020A-8 | 8W | | Φ84*90 | 15° /24° /36° |
| NC-TM020B-8 | 8W | | 83*83*92 | 15° /24° /36° |





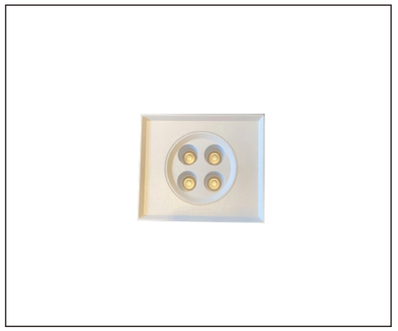

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

IP20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM022-8 | 8W | | 130*110*38 | 15° /24° /36° |
| NC-TM022-16 | 2*8W | | 260*110*38 | 15° /24° /36° |
| NC-TM022-32 | 4*8W | | 260*220*38 | 15° /24° /36° |

材质Material：铝 Aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K

2700K 3000K 3500K 4000K 5000K

15° 30° 45°

IP20 CRI ≥90 COB Life 30000h CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SX006-10 | 10W | | 138*35*65 | 15° /30° /45° |
| NC-SX006-20 | 20W | | 270*35*65 | 15° /30° /45° |
| NC-SX006-30 | 30W | | 402*35*65 | 15° /30° /45° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K




IP20 | CRI ≥97 | COB | Life 30000h | CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM010-7 | 7W | | 100*100*100 | 15° /24° /36° /60° |
| NC-TM010-14 | 2*7W | | 195*100*100 | 15° /24° /36° /60° |
| NC-TM010-28 | 4*7W | | 195*195*120 | 15° /24° /36° /60° |

Surface mounted downlight series/明装筒射灯系列

耐斯照明 Nice Lighting

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K




IP20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM012-10 | 10W | | 117*117*55 | 15° /24° /36° /60° |
| NC-TM012-20 | 2*10W | | 226*117*55 | 15° /24° /36° /60° |
| NC-TM012-30 | 3*10W | | 328*117*55 | 15° /24° /36° /60° |
| NC-TM012-40 | 4*10W | | 226*226*55 | 15° /24° /36° /60° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K




IP20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM011-10 | 10W | | 108*108*110 | 15° /24° /36° /120° |
| NC-TM011-20 | 2*10W | | 202*108*110 | 15° /24° /36° /120° |
| NC-TM011-30 | 3*10W | | 298*108*110 | 15° /24° /36° /120° |
| NC-TM011-40 | 4*10W | | 202*202*110 | 15° /24° /36° /120° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


IP20 | UGR＜16 | CRI ≥97 | COB | Life 30000h | CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM023-21 | 3*7W | | Φ240*38 | 24° / 120° |
| NC-TM023-35 | 5*7W | | Φ300*38 | 24° / 120° |
| NC-TM023-63 | 9*7W | | Φ380*38 | 24° / 120° |
| NC-TM023-56 | 8*7W | | 480*240*38 | 24° / 120° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

IP20 CRI ≥97 COB Life 30000h CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM014A-12 | 12W | | Φ75*108 | 15° /24° /36° |
| NC-TM014B-12 | 12W | | 75*75*108 | 15° /24° /36° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

IP20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM015A-10 | 10W | | Φ80*100 | 15° /24° /36° |
| NC-TM015B-8 | 8W | | Φ80*100 | 15° /24° /36° |





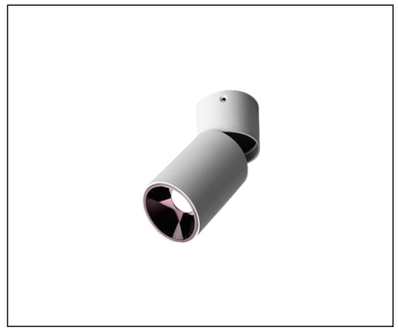

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

IP20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM016-12 | 12W | | Φ70*150 | 15° /24° /36° |
| NC-TM016-18 | 18W | | Φ70*180 | 15° /24° /36° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥97
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36° 60°

IP20 UGR＜16 CRI ≥97 COB Life 30000h CE

## 明装筒灯 Surface mounted downlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-TM024-12 | 12W | | Φ72*108 | 15° /24° /36° /60° |
| NC-TM024-18 | 18W | | Φ92*130 | 15° /24° /36° /60° |

耐斯照明
Nice Lighting

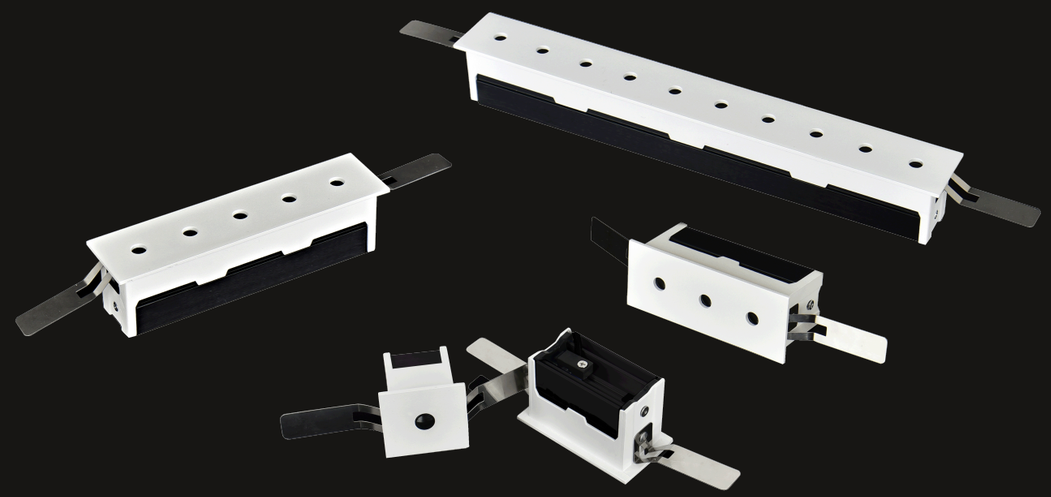

# 线性射灯系列
# Linear spotlight series

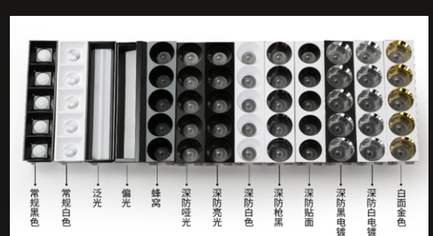


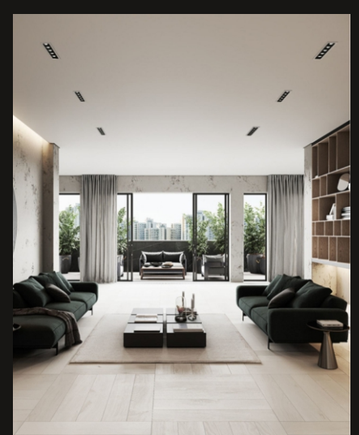





材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


30°

Ip20 | UGR < 16 | CRI ≥90 | SMD | Life 30000h | CE


A B

## 线性射灯 Linear spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SX001A-6 | 3*2W | 96*35 | 100*40*43 | 30° |
| NC-SX001A-10 | 5*2W | 156*35 | 162*40*43 | 30° |
| NC-SX001A-20 | 10*2W | 306*35 | 312*40*43 | 30° |
| NC-SX001B-6 | 3*2W | 106*46 | 105*76*42 | 30° |
| NC-SX001B-10 | 5*2W | 166*46 | 165*76*42 | 30° |
| NC-SX001B-20 | 10*2W | 316*46 | 315*76*42 | 30° |

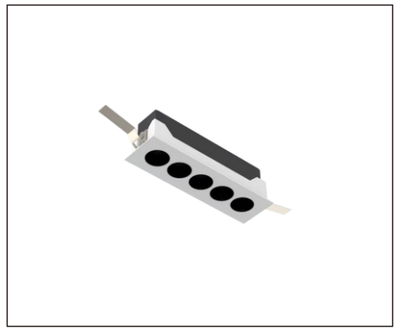

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K


2700K 3000K 3500K 4000K 5000K


15° 24° 36°

Ip20 | UGR < 16 | CRI ≥90 | SMD | Life 30000h | CE


A B C

## 线性射灯 Linear spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SX002A-6 | 3*2W | 94*36 | 97*43*44 | 15° /24° /36° |
| NC-SX002A-10 | 5*2W | 148*36 | 150*43*44 | 15° /24° /36° |
| NC-SX002A-20 | 10*2W | 280*36 | 283*43*44 | 15° /24° /36° |
| NC-SX002B-4 | 2*2W | 78*40 | 108*74*44 | 15° /24° /36° |
| NC-SX002B-10 | 5*2W | 160*40 | 188*74*44 | 15° /24° /36° |
| NC-SX002B-20 | 10*2W | 285*40 | 320*74*44 | 15° /24° /36° |
| NC-SX002C-10 | 5*2W | 160*57 | 166*63*44 | 15° /24° /36° |
| NC-SX002C-20 | 10*2W | 290*57 | 298*63*44 | 15° /24° /36° |

耐斯照明 Nice Lighting

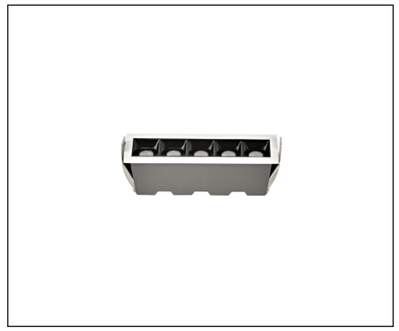

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 30° 45°

Ip20 UGR < 16 CRI ≥90 SMD Life 30000h CE

## 线性射灯 Linear spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SX003-4 | 2*2W | 67*37 | 75*45*50 | 15° /30° /45° |
| NC-SX003-10 | 5*2W | 139*39 | 147*45*50 | 15° /30° /45° |
| NC-SX003-20 | 10*2W | 272*37 | 279*45*50 | 15° /30° /45° |
| NC-SX003-30 | 15*2W | 403*37 | 411*45*50 | 15° /30° /45° |

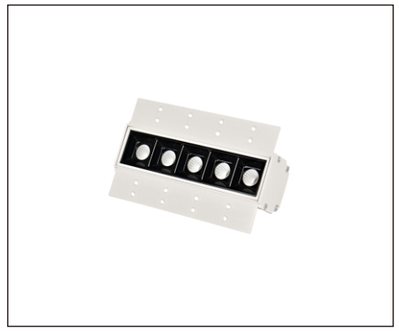

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 30° 45°

Ip20 UGR < 16 CRI ≥90 SMD Life 30000h CE

## 线性射灯 Linear spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SX013-10 | 5*2W | 139*37 | 147*45*50 | 15° /30° /45° |
| NC-SX013-20 | 10*2W | 272*37 | 279*45*50 | 15° /30° /45° |
| NC-SX013-30 | 15*2W | 403*37 | 411*45*50 | 15° /30° /45° |





耐斯照明 Nice Lighting

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 30° 45°

Ip20 UGR < 16 CRI ≥90 SMD Life 30000h CE

## 线性射灯 Linear spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SX005-10 | 5*2W | 152*50 | 158*62*50 | 15° /30° /45° |
| NC-SX005-20 | 10*2W | 280*50 | 291*62*50 | 15° /30° /45° |
| NC-SX005-30 | 15*2W | 420*50 | 426*62*50 | 15° /30° /45° |
| NC-SX005-20 | 10*2W | 155*100 | 168*122*53 | 15° /30° /45° |
| NC-SX005-40 | 20*2W | 285*100 | 300*122*53 | 15° /30° /45° |
| NC-SX005-60 | 30*2W | 420*100 | 433*122*53 | 15° /30° /45° |

材质Material：压铸铝Die-cast aluminum
颜色Color：砂黑Sand Black，砂白Sand White
显色指数CRI：Ra≥90
输入电压Input：AC220V/50Hz
色温CCT：2700K/3000K/3500K/4000K/5000K



2700K 3000K 3500K 4000K 5000K

15° 24° 36°

Ip20 UGR < 16 CRI ≥90 SMD Life 30000h CE

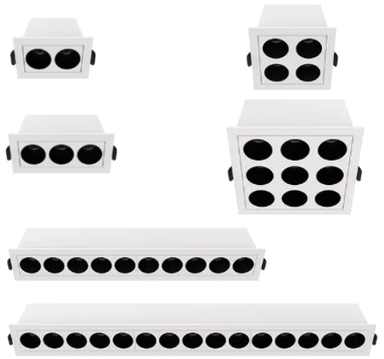

## 线性射灯 Linear spotlight

| 型号 Model | 功率 Power | 开孔尺寸 Cutout | 整灯尺寸 Size(DxH) | 发光角度 Beam Angle（°） |
|---|---|---|---|---|
| NC-SX012-4 | 2*2W | 60*35 | 69*46*52 | 15° /24° /36° |
| NC-SP012-6 | 3*2W | 88*35 | 96*46*52 | 15° /24° /36° |
| NC-SP012-8 | 4*2W | 68*68 | 76*76*52 | 15° /24° /36° |
| NC-SX012-10 | 5*2W | 140*35 | 148*46*52 | 15° /24° /36° |
| NC-SP012-18 | 9*2W | 98*98 | 106*106*52 | 15° /24° /36° |
| NC-SP012-20 | 10*2W | 276*35 | 285*46*52 | 15° /24° /36° |
| NC-SP012-30 | 15*2W | 408*35 | 417*46*52 | 15° /24° /36° |